

## The Evolution of the All-Season Performance Touring Tire

The Sumitomo **HTR ENHANCE**, where progressive design and precision performance meet to provide a superior all-season driving experience.

Featuring industry-leading warranty protection and engineered to go the distance, the HTR ENHANCE is the next evolution of the performance touring tire. The ENHANCE L/X is the perfect choice for drivers of performance-oriented sedans and coupes seeking the optimum blend of ride comfort and handling agility, while the ENHANCE C/X is tuned to meet the unique performance and durability requirements of drivers of later model crossovers and SUV's.

Security, confidence, adrenaline ... Enhance the journey with the Sumitomo **HTR ENHANCE!**




### *Progressive Design. Precision Performance.*

- 1 5 PITCH BLOCK COMBINATION:**  
Enhance noise performance.
- 2 ASYMMETRIC 5 RIB PATTERN:**  
Enhance ride stability and even wear.
- 3 LONG LATERAL GROOVES:**  
Enhance superior all season wet traction performance.
- 4 WIDER OUTSIDE BLOCK:**  
Enhance high speed handling and cornering stability.
- 5 STRATEGIC TREAD BLOCK SIPING:**  
Enhances prevention of irregular treadwear.
- 6 MULTIPLE WIDE CIRCUMFERENTIAL GROOVES:**  
Enhance water evacuation to prevent hydroplaning.

## Industry Leading Protection Package for Enhanced Peace of Mind

- 90,000-Mile Treadwear for T-Rated L/X
- 70,000-Mile Treadwear for H & V-Rated L/X
- 50,000-Mile Treadwear for W-Rated L/X
- 60,000-Mile Treadwear for T, H & V-Rated C/X
- Free 45-Day Test Drive
- Free 2-Year Roadside Assistance
- Free 1-Year Road Hazard Protection
- Free Defect Replacement for the Life of Usable Tread

## Enhanced Engineering for Every Twist and Turn

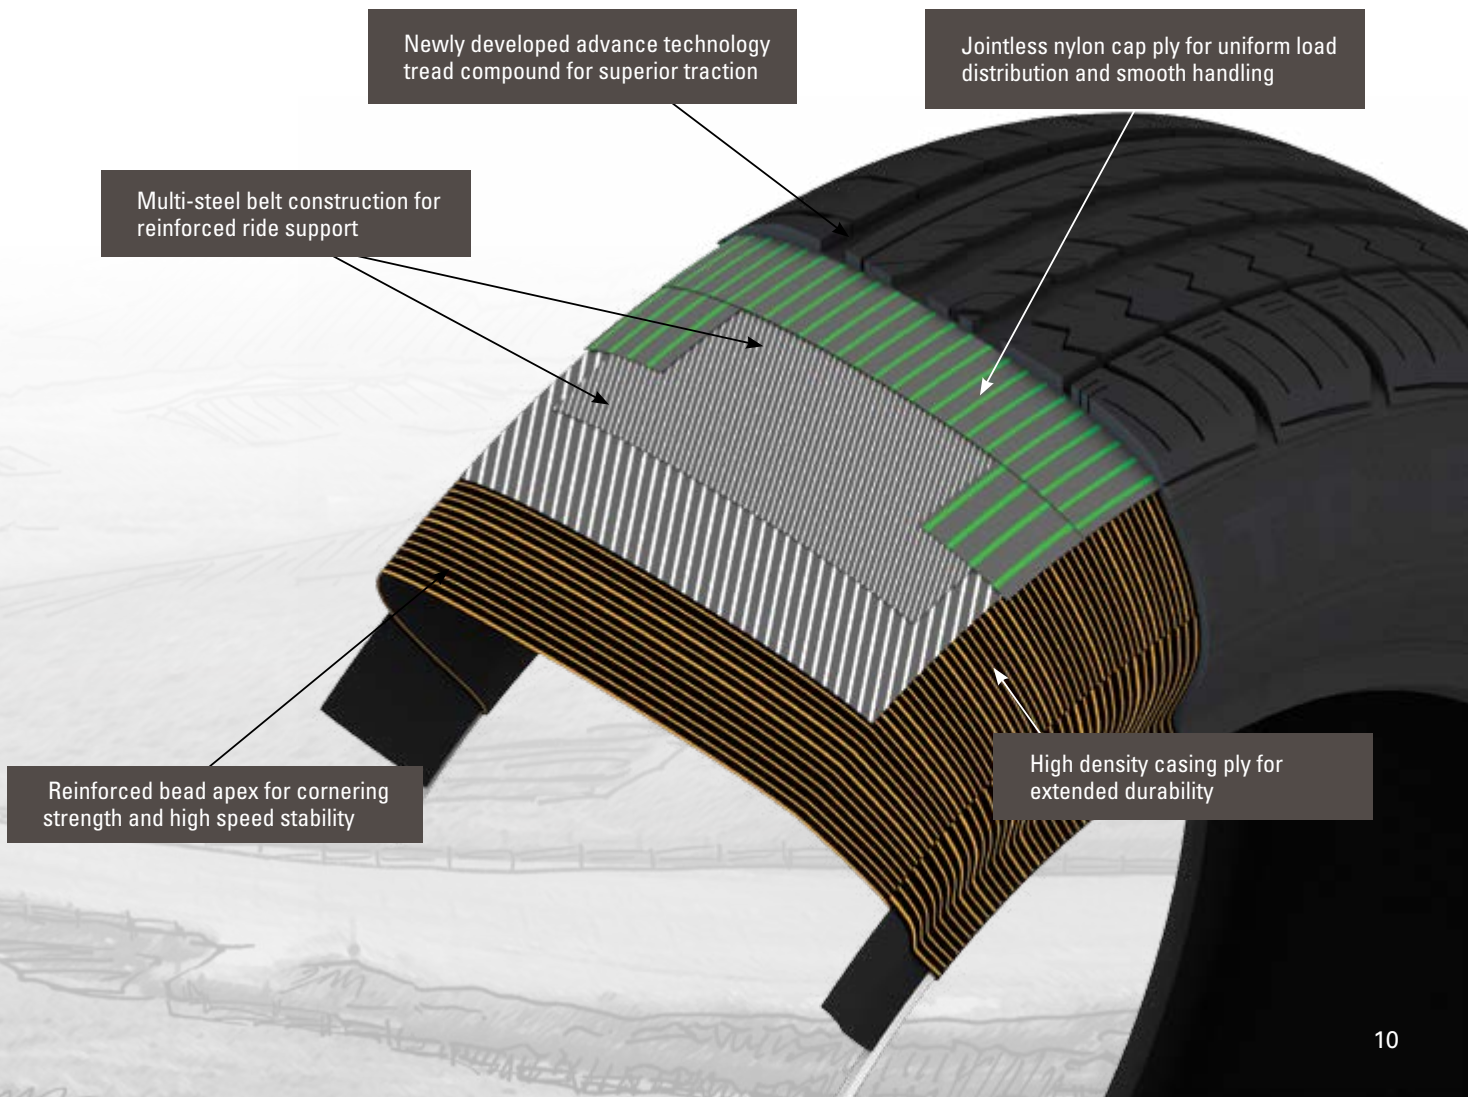

# HTR ENHANCE Premium Performance Touring

HTR ENHANCE LX				UTQG - 700 A B (TR), 600 A A (HR/VR), 440 A A (WR)										
Product Code	Tire Size	Service Description	Measuring Rim Width (in)	Approved Rim Width		Maximum		Overall Diameter (in)	Section Width (in)	Tread Width (in)	Static Loaded Radius (in)	Revs. Per. Mile	Tread Depth	Ship Weight (lbs)
				Min. (in)	Max (in)	Air (lbs psi)	Load (lbs)							
ELT27	185/65R15	88T	5.5	5.0	6.5	44	1,235	24.4	7.4	6.1	11.1	865	11	24.9
ELT28	195/65R15	91T	6.0	5.5	7.0	51	1,356	25.0	8.0	6.4	11.3	848	11	25.2
ELH28	195/65R15	91H	6.0	5.5	7.0	51	1,356	25.0	8.0	6.4	11.3	848	11	23.8
ELT44	205/65R15	94T	6.0	5.5	7.5	51	1,477	25.5	8.2	6.7	11.5	832	11	25.2
ELH44	205/65R15	94H	6.0	5.5	7.5	51	1,477	25.5	8.2	6.7	11.5	832	11	23.8
ELT73	185/60R15	84T	5.5	5.0	6.5	44	1,102	23.7	5.0	6.5	10.8	889	11	24.9
ELT41	195/60R15	88T	6.0	5.5	7.0	51	1,235	24.2	7.9	6.4	11.0	874	11	25.2
ELH41	195/60R15	88H	6.0	5.5	7.0	51	1,235	24.2	7.9	6.4	11.0	874	11	23.3
ELT55	215/65R16	98T	6.5	6.0	7.5	44	1,653	27.0	8.7	7.0	12.2	786	11	25.2
ELT99	235/65R16	103T	7.0	6.5	8.5	44	1,929	28.0	9.4	7.6	12.6	760	12	25.5
ELT61	205/60R16	92T	6.0	5.5	7.5	51	1,389	25.6	8.2	6.7	11.7	823	11	24.9
ELH61	205/60R16	92H	6.0	5.5	7.5	51	1,389	25.6	8.2	6.7	11.7	823	11	23.6
ELV61	205/60R16	92V	6.0	5.5	7.5	51	1,389	25.6	8.2	6.7	11.7	823	11	23.6
ELT48	215/60R16	95T	6.5	6.0	7.5	51	1,521	26.1	8.7	7.0	11.9	811	11	25.2
ELH48	215/60R16	95H	6.5	6.0	7.5	51	1,521	26.1	8.7	7.0	11.9	811	11	23.8
ELV48	215/60R16	95V	6.5	6.0	7.5	51	1,521	26.1	8.7	7.0	11.9	811	11	23.8
ELT52	225/60R16	98T	6.5	6.0	8.0	44	1,653	26.6	9.0	7.3	12.0	795	11	25.2
ELV52	225/60R16	98V	6.5	6.0	8.0	44	1,653	26.6	9.0	7.3	12.0	795	11	23.8
ELV56	235/60R16	100V	7.0	6.5	8.5	51	1,764	27.0	9.4	7.6	12.2	786	11	24.1
ELT42	205/55R16	91T	6.5	5.5	7.5	51	1,356	24.9	8.3	7.0	11.4	845	11	24.7
ELH42	205/55R16	91H	6.5	5.5	7.5	51	1,356	24.9	8.3	7.0	11.4	845	11	23.3
ELH57	215/55R16	93H	7.0	6.0	7.5	51	1,433	25.2	8.8	7.3	11.5	837	11	24.1
ELV42	225/55R16	95V	7.0	6.0	8.0	51	1,521	25.6	9.2	7.6	11.7	823	11	23.8
ELT97	215/65R17	99T	6.5	6.0	7.5	44	1,709	28.1	8.6	7.0	12.7	753	11	25.2
ELH76	225/65R17	102H	6.5	6.0	8.0	51	1,874	28.5	9.0	7.3	12.9	742	11	24.1
ELT95	215/60R17	96T	6.5	6.0	7.5	44	1,565	27.2	8.7	7.0	12.4	778	11	25.2
ELT96	225/60R17	99T	6.5	6.0	8.0	44	1,709	27.7	8.9	7.3	12.6	764	11	25.2
ELT07	235/60R17	102T	7.0	6.5	8.5	44	1,874	28.1	9.4	7.6	12.7	753	12	25.5
ELV71	215/55R17	94V	7.0	6.0	7.5	51	1,477	26.3	8.7	7.3	12.0	803	11	23.6
ELT88	225/55R17	97T	7.0	6.0	8.0	44	1,609	26.8	9.2	7.6	12.2	788	11	25.2
ELV88	225/55R17	97V	7.0	6.0	8.0	44	1,609	26.8	9.2	7.6	12.2	788	11	23.8
ELH89	235/55R17	99H	7.5	6.5	8.5	51	1,709	27.1	9.5	8.0	12.4	778	11	24.1
ELW90	205/50R17	89W	6.5	5.5	7.5	51	1,279	25.2	8.3	7.2	11.6	832	10	23.0
ELV58	215/50R17	91V	7.0	6.0	7.5	51	1,356	25.6	8.8	7.6	11.8	821	11	23.6
ELV66	225/50R17	94V	7.0	6.0	8.0	51	1,477	26.0	9.1	7.9	11.9	808	11	23.8
ELV69	235/50R17	96V	7.5	6.5	8.5	51	1,565	26.3	9.6	8.3	12.0	800	11	24.1
ELW25	215/45R17	87W	7.0	7.0	8.0	51	1,201	24.8	8.4	7.7	11.5	840	10	23.0
ELW21	225/45R17	91W	7.5	7.0	8.5	51	1,356	25.0	8.9	8.1	11.5	834	10	23.0
ELW54	235/45R17	94W	8.0	7.5	9.0	51	1,477	25.4	9.4	8.5	11.7	821	10	23.0
ELW19	245/45R17	95W	8.0	7.5	9.0	51	1,521	25.7	9.5	8.7	11.8	813	10	23.0
ELW50	245/40R17	91W	8.5	8.0	9.5	51	1,356	24.7	9.8	8.7	11.4	842	10	23.0
ELV03	235/55R18	100V	7.5	6.5	8.5	51	1,764	28.2	9.5	8.0	12.9	747	11	24.1
ELV13	235/50R18/XL	101V	7.5	6.5	8.5	50	1,819	27.3	9.6	8.3	12.5	774	11	24.1
ELW02	245/50R18	100W	7.5	7.0	8.5	51	1,764	27.7	10.0	8.7	12.7	760	10	30.2
ELW14	225/45R18	91W	7.5	7.0	8.5	51	1,356	25.9	9.0	8.1	12.0	803	10	23.0
ELW17	245/45R18	96W	8.0	7.5	9.0	51	1,565	26.7	9.5	8.7	12.3	783	10	23.0
ELW55	255/45R18	99W	8.5	8.0	9.5	51	1,709	27.1	10.0	8.9	12.4	771	10	28.9
ELW78	225/40R18/XL	92W	8.0	7.5	9.0	50	1,389	25.1	9.1	8.1	11.7	826	10	23.0
ELW84	245/40R18	93W	8.5	8.0	9.5	51	1,433	25.9	9.8	8.7	12.0	805	11	24.1
ELW94	245/45R19	98W	8.0	7.5	9.0	51	1,653	27.7	9.6	8.5	12.8	753	10	28.7
ELW81	245/40R19	94W	8.5	8.0	9.5	51	1,477	26.7	9.8	8.7	12.4	776	10	26.9
ELW04	255/40R19/XL	100W	9.0	8.5	10.0	50	1,764	27.1	10.2	9.0	12.6	769	10	28.4
ELW15	275/40R19	101W	9.5	9.0	11.0	51	1,819	27.7	10.9	9.7	12.8	753	10	32.2

<b>HTR ENHANCE CX</b>													<b>UTQG - 600 A B (TR), 600 A A (HR/VR)</b>		
Product Code	Tire Size	Service Description	Measuring Rim Width (in)	Approved Rim Width		Maximum		Overall Diameter (in)	Section Width (in)	Tread Width (in)	Static Loaded Radius (in)	Revs. Per. Mile	Tread Depth	Ship Weight (lbs)	
				Min. (in)	Max (in)	Air (lbs psi)	Load (lbs)								
ECT12	215/70R16	100T	6.5	5.5	7.0	44	1,764	27.9	8.7	6.9	12.6	755	11	25.2	
ECT16	225/70R16	103T	6.5	6.0	7.5	44	1,929	28.4	9.0	7.1	12.8	740	12	25.5	
ECT53	235/70R16	106T	7.0	6.0	8.0	44	2,094	29.0	9.4	7.4	13.0	730	12	25.5	
ECT76	225/65R17	102T	6.5	6.0	8.0	51	1,874	28.5	9.0	7.3	12.9	742	12	25.5	
ECT77	235/65R17	104T	7.0	6.5	8.5	51	1,984	29.1	9.4	7.6	13.1	732	11	25.2	
ECH77	235/65R17	104H	7.0	6.5	8.5	51	1,984	29.1	9.4	7.6	13.1	732	11	24.1	
ECT67	245/65R17	107T	7.0	7.0	8.5	44	2,149	29.5	9.8	8.0	13.2	721	12	25.5	
ECT59	265/65R17	112T	8.0	7.5	9.5	44	2,469	30.5	10.9	8.6	13.7	696	12	25.5	
ECT05	235/65R18	106T	7.0	6.5	8.5	44	2,094	30.0	9.5	7.6	13.6	705	11	25.2	
ECH49	235/60R18	103H	7.0	6.5	8.5	51	1,929	29.1	9.2	7.6	13.2	725	11	24.4	
ECT68	245/60R18	105T	7.0	7.0	8.5	44	2,039	29.6	9.7	7.9	13.3	717	11	25.2	
ECT91	265/60R18	110T	8.0	7.5	9.5	44	2,337	30.5	10.7	8.7	13.7	696	11	25.2	
ECV36	255/55R18	105V	8.0	7.0	9.0	51	2,039	29.1	10.5	8.7	13.2	727	11	24.1	
ECH72	255/60R19	109H	7.5	7.0	9.0	51	2,271	31.1	10.2	8.3	14.1	681	11	38.1	
ECH09	255/50R19/XL	107H	8.0	7.0	9.0	50	2,149	29.2	10.4	9.1	13.3	723	11	35.3	

## Sumitomo HTR ENHANCE

### FEATURES:

#### EXPANDED SIZING

More than 65 T/H/V/W sizes for superior segment coverage

#### PROGRESSIVE DESIGN

Stylish and functional asymmetric design for superior performance

#### REFINED RIDE COMFORT

Uniquely engineered for a smooth, quiet ride

#### ADVANCED ALL SEASON PERFORMANCE

Anti-hydroplane design features for wet traction effectiveness

#### EXTENDED TREADWEAR

Specially developed tread compound for long, even wear

#### INCREASED WARRANTY PROTECTION

Industry leading protection package for ultimate peace of mind

